


FDP 6.900

Full Range Class D 6-Channel amplifier

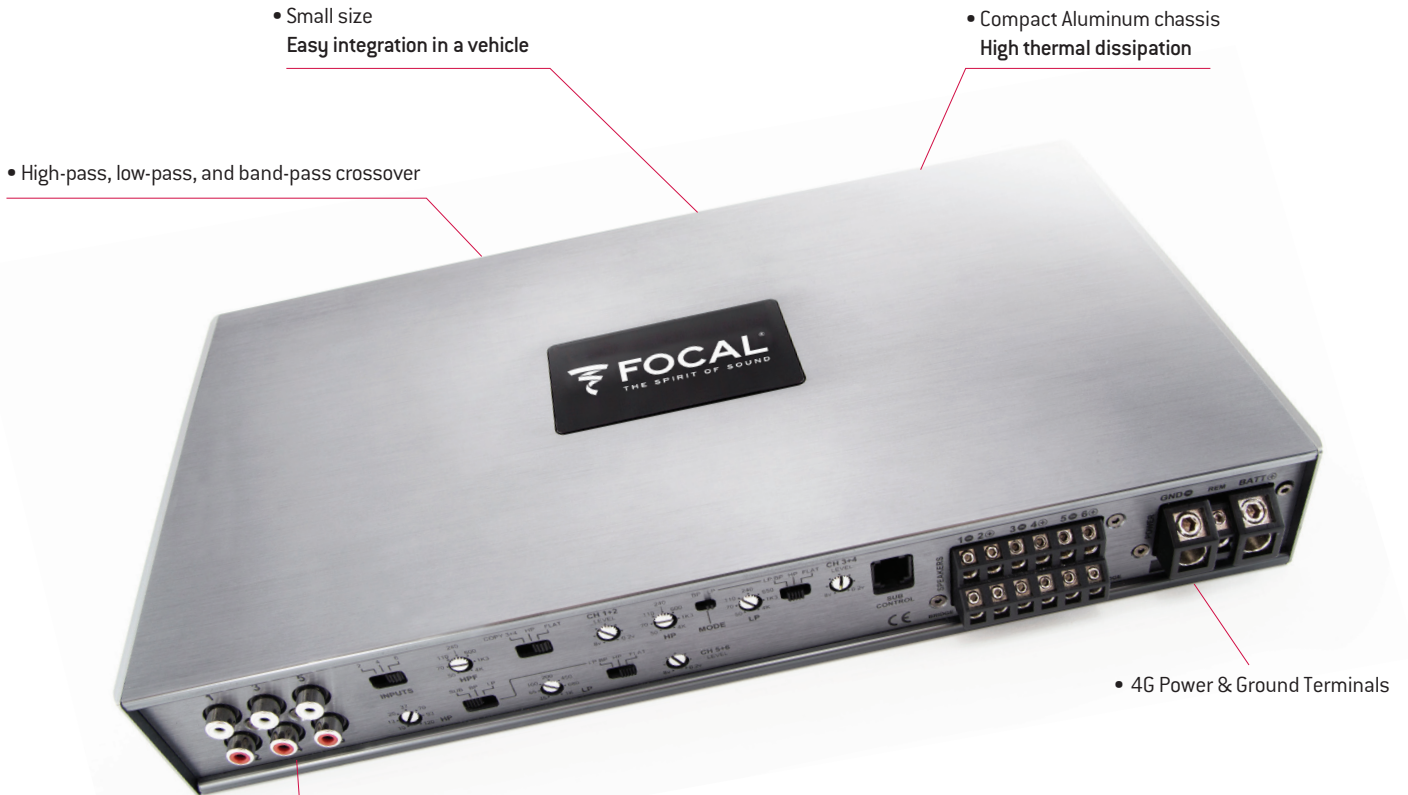

- High and low-level inputs
Suits any installation
- “Auto Power On” with high-level input
Easier Integration with factory head unit
- Selectable Balanced or Unbalanced inputs
- Designed & Engineered in California
Not a “me too” amplifier design
- High-pass, low-pass, and band-pass crossover
To accommodate complex 3-way systems

- Remote sub control
with LED clipping indicator



ADVANTAGES

- Very small size for power output
- Can be used in 3, 4, 5, & 6 channel modes
- High-level input, compatible with OEM Stereo
- Easily accessible settings
- Remote sub control
- Invisible mounting bracket
- Highest level of crossover flexibility

TECHNICAL CHARACTERISTICS

Power into 4 Ohms: 6x150W rms
Power into 2 Ohms: 4x200 + 2x250W rms
Bridged mode into 4 Ohms: 2x400 + 1x500W rms
Bridged mode into 2 Ohms(Ch 5 & 6 only): 1 x 600 W rms
Frequency response: 5Hz–30kHz
Signal/noise ratio: >101dB [A]

Adjustable gain 200mV + 10V
Dimensions (HxLxD): 2 x 14^{3/8} x 7^{3/4}in
{ 50x364x196mm }
Protections: Short-circuit, thermal overload,
polarity reversal, DC

