

UNIVERSAL ICU100

Technical Sheet

Woofer




- Polyglass cone, natural sound
- Compact dimensions, easy to install

SPECIFICATIONS

Nominal power	40W RMS	
Maximum power	80W	
Sensitivity (2,83V/1m)	90.3dB	
Frequency response	100Hz-21kHz	
Cone type	Polyglass	
Surround type	Butyl	
Nom. impedance	4Ω	
VC diameter	25mm	1"
Net weight	500g	1.1lbs


FREQUENCY RESPONSE/IMPEDANCE

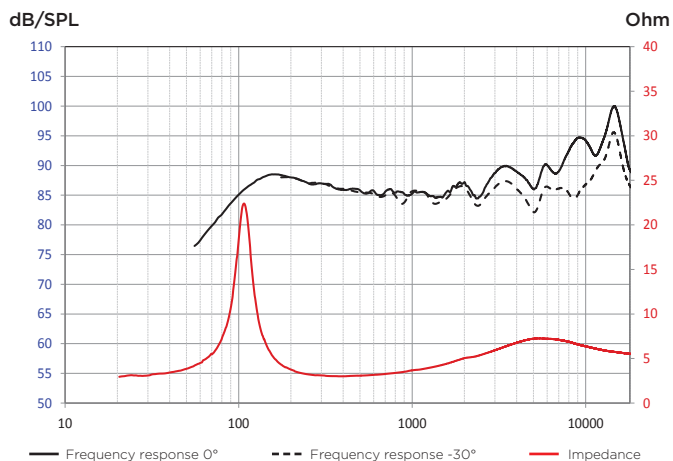

PARAMETERS

Fs	105Hz
Vas	1.5l
Qts	0.75
Qes	0.85
Qms	7
Re	2.8Ω
Sd	53cm ²
Cms	0.4mm/N
Mms	5.4g
Bl	3.5N/A

MECHANICAL DRAWING

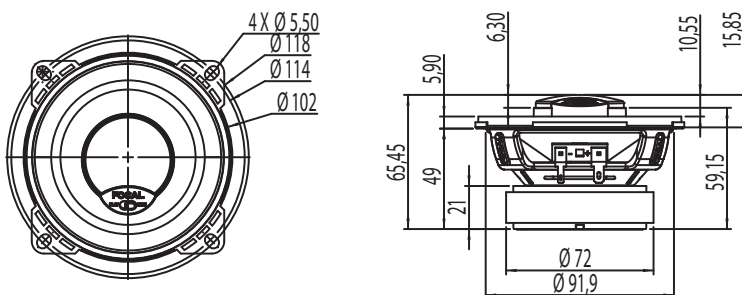

Integration
INSTANT GRATIFICATION