

ACCESS


165 YE

Product Data Sheet

2-way component kit

- Tweeter thermal protection
- Adjustable tweeter level
(3 positions : -3 / 0 / +3dB)
Adjust soundstage position
- Air core inductors
For low distortion

- (DFS) Dual Fiberglass Structure cone
High resistance (Power, climatic conditions, humidity...)
- Phase plug
Midrange control
- Grilles new design
Profiled

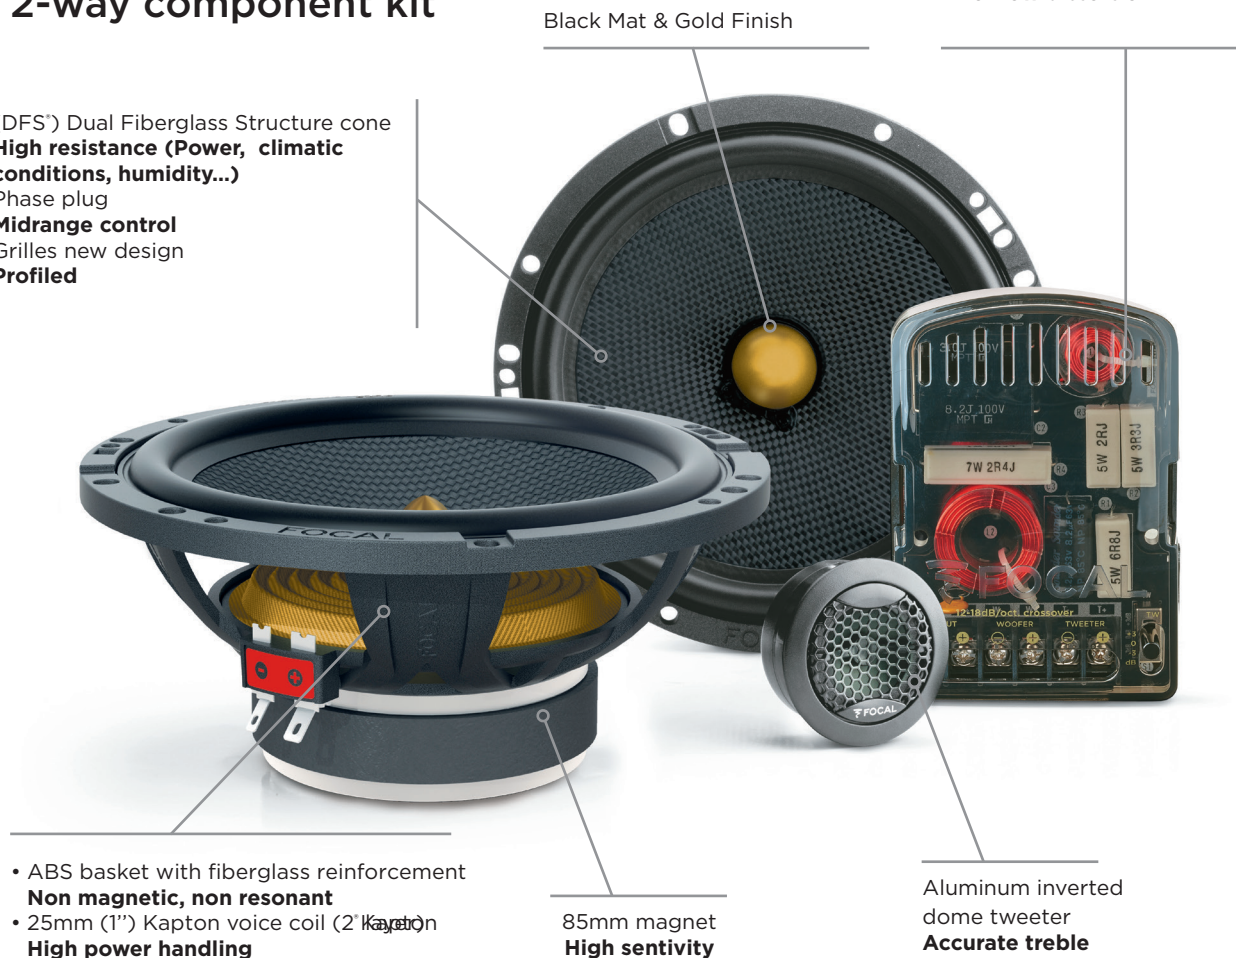

- ABS basket with fiberglass reinforcement
Non magnetic, non resonant
- 25mm (1") Kapton voice coil (2" Kevlar)
High power handling

85mm magnet
High sensitivity

Aluminum inverted dome tweeter
Accurate treble

WHAT MAKES THE DIFFERENCE

- Cone DFS (Dual fiberglass Structure)
(climatic and power) high resistance
- High sensitivity (Works well with head unit internal amplifier)
- Tweeter level adjustment Extended in low frequencies
- Exclusive product in limited edition

TECHNICAL CHARACTERISTICS

Woofer : 6¹/₂" (165mm)
Voice-coil diameter : 1" (25mm)
Voice-coil height : 0⁷/₁₆" (11mm)
Magnet : 3¹/₃" (85mm)
Tweeter : Aluminum inverted dome
Adjustable Tweeter level : 3 positions (-3/0/+3dB)

Crossover : 12/18 dB/oct
Max. power : 140 Watts
Nom. power : 70 Watts RMS
Sensitivity (2.83V/1m) : 91.3dB
Frequency response : 60Hz - 20kHz
Accessories : Supplied grilles

Performance
CREATE YOUR SOUND

FOCAL
LISTEN BEYOND