
IS FORD 690

Product Data Sheet

The IS FORD 690 2-way component kit is designed for all drivers who wish to replace their original audio system with a quality sound solution. The speaker drivers employ Polyglass technology, which delivers welldefined midrange and bass, and the Aluminium inverted dome tweeter, a Focal technology that provides perfect treble reproduction. This kit is designed for vehicles that have tweeter slots.

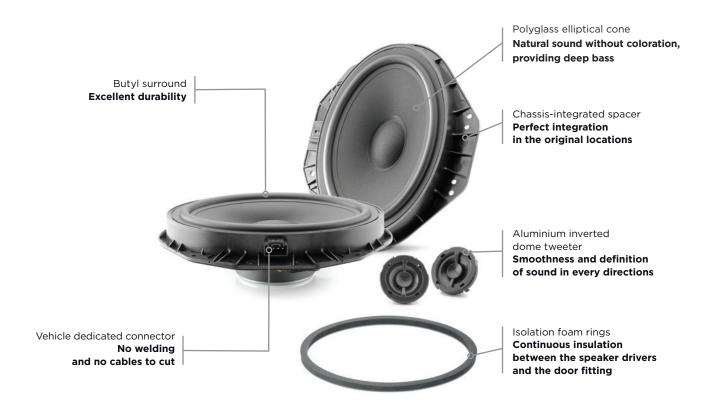

Key Points

- Quick and easy install
- No modifications needed on the vehicle
- Invisible integration
- Sound quality superior to the original one
- No additional accessories required

Check your vehicle compatibility at www.focal-inside.com





[Ford: Kuga, Ranger front locations, F-Series, Focus, Fiesta... / Lincoln: MKX, Navigator rear locations...]

Power max. 150W Power nom. 75W RMS Sensitivity (2.83V/1m) 92.3dB Frequency response $50Hz - 20kHz$ Impedance 4Ω Woofer $5^{15}/_{16} \times 9^{1/}_{16}$ " (150 x 230mm) Mounting depth $15/_{16}$ " (41mm) Cone Polyglass Voice coil diameter $13/_{16}$ " (30mm) Magnet Ferrite Surround Butyl Tweeter Compact Aluminium inverted dome Crossover Woofer: integrated Tweeter: on line	Туре	2-way component kit
Sensitivity (2.83V/1m) 92.3dB Frequency response 50 Hz $- 20$ kHz Impedance 4Ω Woofer 5^{15} /16 $\times 9$ 1/16" (150 $\times 230$ mm) Mounting depth 1^{5} /8" (41mm) Cone Polyglass Voice coil diameter 1^{5} /16" (30mm) Magnet Ferrite Surround Butyl Tweeter Compact Aluminium inverted dome Crossover Woofer : integrated	Power max.	150W
	Power nom.	75W RMS
$\begin{array}{llllllllllllllllllllllllllllllllllll$	Sensitivity (2.83V/1m)	92.3dB
Woofer 515/16 x 91/16" (150 x 230mm) Mounting depth 15/8" (41mm) Cone Polyglass Voice coil diameter 15/16" (30mm) Magnet Ferrite Surround Butyl Tweeter Compact Aluminium inverted dome Crossover Woofer : integrated	Frequency response	50Hz - 20kHz
Mounting depth 15%" (41mm) Cone Polyglass Voice coil diameter 15/16" (30mm) Magnet Ferrite Surround Butyl Tweeter Compact Aluminium inverted dome Crossover Woofer : integrated	Impedance	4Ω
Cone Polyglass Voice coil diameter 13/6" (30mm) Magnet Ferrite Surround Butyl Tweeter Compact Aluminium inverted dome Crossover Woofer: integrated	Woofer	5 ¹⁵ / ₁₆ x 9½ ₆ " (150 x 230mm)
Voice coil diameter 1¾6" (30mm) Magnet Ferrite Surround Butyl Tweeter Compact Aluminium inverted dome Crossover Woofer : integrated	Mounting depth	15%" (41mm)
Magnet Ferrite Surround Butyl Tweeter Compact Aluminium inverted dome Crossover Woofer : integrated	Cone	Polyglass
Surround Butyl Tweeter Compact Aluminium inverted dome Crossover Woofer : integrated	Voice coil diameter	1¾6" (30mm)
Tweeter Compact Aluminium inverted dome Crossover Woofer : integrated	Magnet	Ferrite
inverted dome Crossover Woofer : integrated	Surround	Butyl
Crossover Woofer : integrated	Tweeter	Compact Aluminium
· · · · · · · · · · · · · · · · · · ·		inverted dome
Tweeter : on line	Crossover	Woofer : integrated
		Tweeter : on line



