

K2 POWER SUB 30 KXE

Technical Sheet


Subwoofer 12"



SPECIFICATIONS

Nominal power	800W RMS	
Maximum power	1600W	
Sensitivity (2.83V/1m)	86.5dB	
Cone	K2 Sandwich	
Surround	Butyl	
Nom. impedance	4+4Ω	
DC resistance	3.2+3.2Ω	
VC diameter	65mm	2 1/2"
Former	Glass fiber	
Layers	4	
Wire	CCAW	
Net weight	11.2kg	24.7lbs
Driver displacement	4l	0.14 cu.ft.

FREQUENCY RESPONSE/IMPEDANCE

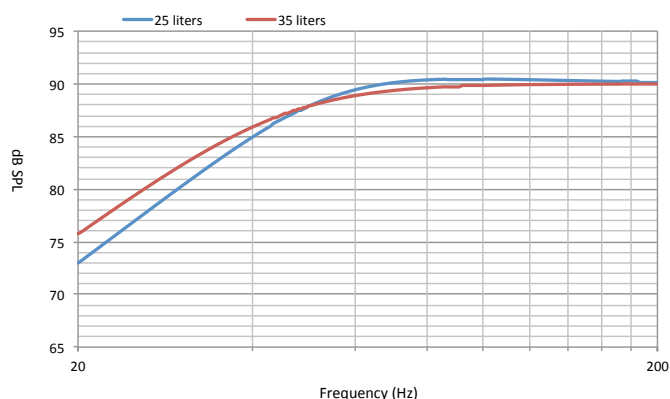

PARAMETERS

Rdc	3.2+3.2Ω
Fs	29Hz
Mms	183g
Cms	0.15mm/N
Vas	50l
Qts	0.46
Qes	0.49
Qms	6.1
Bxl	21.3 N/A
Sd	502cm ²
SPL	87dB
Xmax	22.5mm

MECHANICAL DRAWING (MM)

