

SLATEFIBER 65 SF

Technical Sheet


2.5" speaker



SPECIFICATIONS

Nominal power	40W RMS	
Maximum power	80W	
Sensitivity	87dB	
Nom. impedance	4Ω	
Cone	Slatefiber	
Surround	Butyl	
DC resistance	2.8Ω	
VC diameter	25mm	1"
Former	Kapton	
Layers	2	
Wire	Copper	
Net weight	150g	0.33lbs
Frequency response	250-11kHz	

FREQUENCY RESPONSE/IMPEDANCE

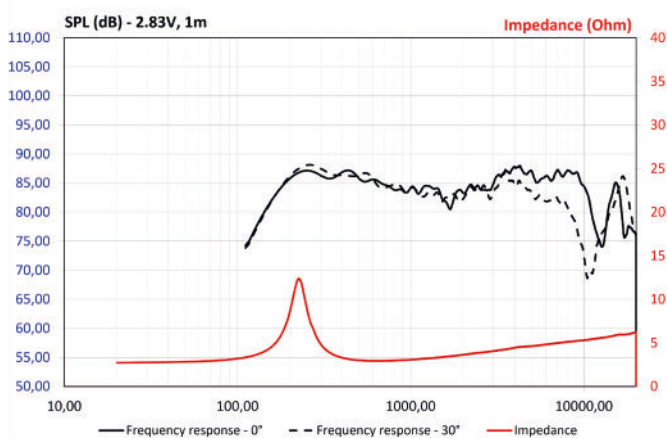

PARAMETERS

Rdc	2.8Ω
Fs	230Hz
Mms	2.8g
Cms	0.2mm/N
Vas	0.12l
Qts	1
Qes	1.3
Qms	4.5
Bxl	2.9N/A
Sd	22cm ²
SPL	87dB
Xmax	2mm

MECHANICAL DRAWING (MM)

