

SLATEFIBER

165 SF3

Technical Sheet


6.5" speaker



SPECIFICATIONS

Nominal power	80W RMS	
Maximum power	160W	
Sensitivity	91dB	
Nom. impedance	4Ω	
Cone	Slatefiber	
Surround	Butyl	
DC resistance	2.8Ω	
VC diameter	25mm	1"
Former	Kapton	
Layers	2	
Wire	Copper	
Net weight	980g	2.16lbs
Frequency response	55-21kHz	

FREQUENCY RESPONSE/IMPEDANCE

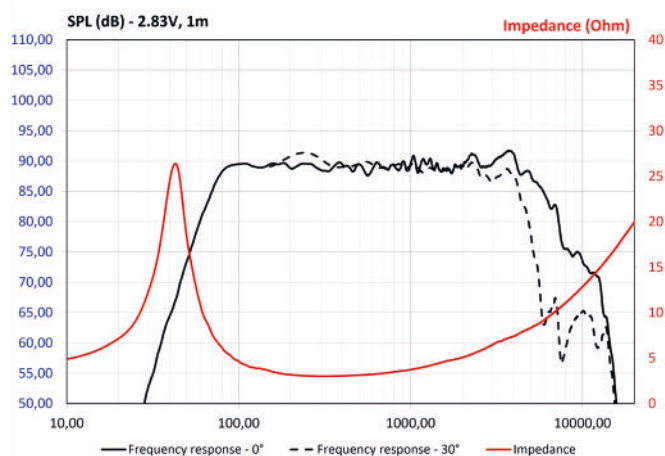

PARAMETERS

Rdc	2.75Ω
Fs	50Hz
Mms	15g
Cms	0.5mm/N
Vas	12l
Qts	0.55
Qes	0.7
Qms	9
Bxl	4.7N/A
Sd	132cm ²
SPL	91dB
Xmax	4mm

MECHANICAL DRAWING (MM)

