


Midwoofer



SPECIFICATIONS

Nominal power	40W	
Maximum power	80W	
Sensitivity	92.5dB	
Cone	Polyglass	
Nom. impedance	4Ω	
Surround	Butyl	
DC resistance	3.5Ω	
VC diameter	25mm	1"
Former	Kapton	
Layers	2	
Wire	Copper	
Net weight	400g	0.88lbs
Frequency response	80 - 23000Hz	
Crossover	6dB/Oct @4kHz	

IMPEDANCE

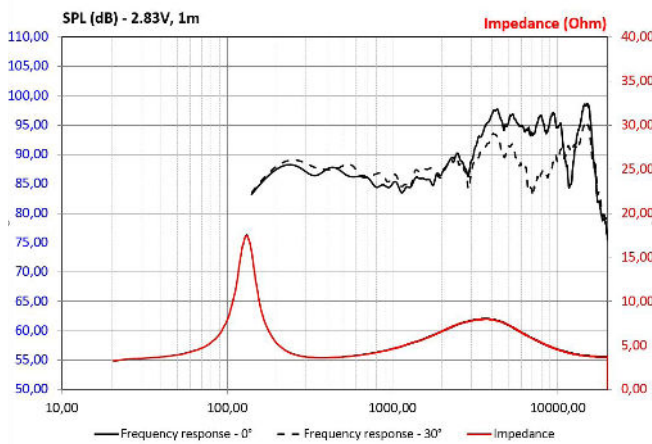

PARAMETERS

Rdc	3.3Ω
Fs	140Hz
Mms	5g
Cms	0.2mm/N
Vas	0.7l
Qts	0.7
Qes	0.77
Qms	6
Bxl	5N/A
Sd	50.7cm ²
SPL	91.5dB
Xmax	2mm

MECHANICAL DRAWING (MM)

