


Midwoofer



SPECIFICATIONS

Nominal power	40W	
Maximum power	80W	
Sensitivity	92.5dB	
Cone	Polyglass	
Nom. impedance	4Ω	
Surround	Butyl	
DC resistance	3.5Ω	
VC diameter	25mm	3/4"
Former	Kapton	
Layers	2	
Wire	Copper	
Net weight	400g	0.88lbs
Frequency response	80 - 23000Hz	
Crossover	6dB/Oct @4kHz	



IMPEDANCE

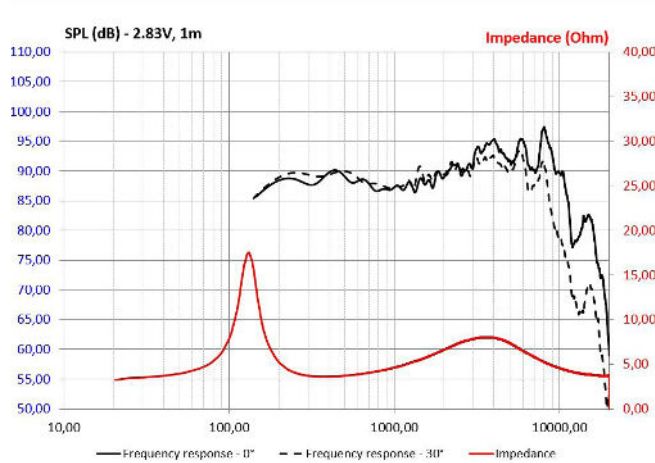

PARAMETERS

Rdc	3.3Ω
Fs	140Hz
Mms	5g
Cms	0.2mm/N
Vas	0.7l
Qts	0.7
Qes	0.77
Qms	6
Bxl	5N/A
Sd	50.7cm ²
SPL	91.5dB
Xmax	2mm

MECHANICAL DRAWING (MM)

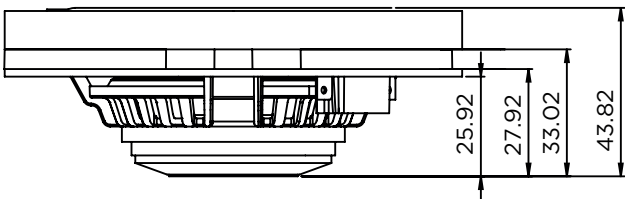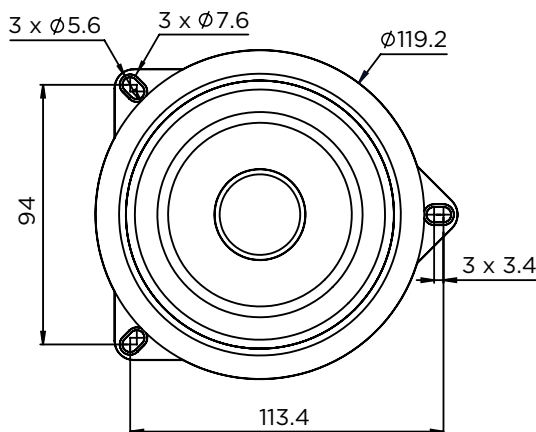


Tweeter



SPECIFICATIONS

Nominal power	20W
Maximum power	80W
Sensitivity	90dB
Nom. impedance	4Ω
Cone	Aluminium Magnesium
Surround	Poron
DC resistance	3.6Ω
VC diameter	20mm1"
Former	Kapton
Layers	2
Wire	Alu
Net weight	60g0.13lb

IMPEDANCE

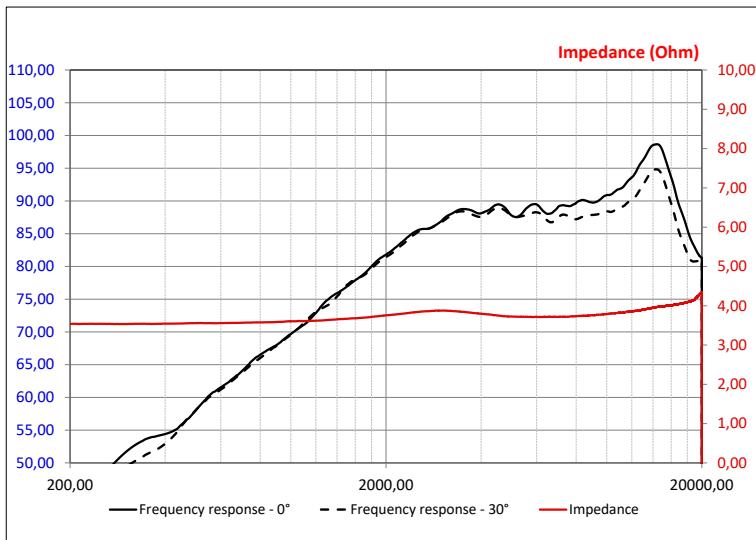

PARAMETERS

Rdc	3.5Ω
Fs	2500Hz

MECHANICAL DRAWING

