


Woofer



SPECIFICATIONS

Nominal power	75W
Maximum power	150W
Sensitivity	93.5dB
Cone	Polyglass
Nom. impedance	4Ω
Surround	Cloth
DC resistance	3.5Ω
VC diameter	25mm1"
Former	Kapton
Layers	2
Wire	Copper
Net weight	850g1.87lbs
Frequency response	55Hz - 20 000Hz
Crossover	6dB/Oct @4kHz



IMPEDANCE

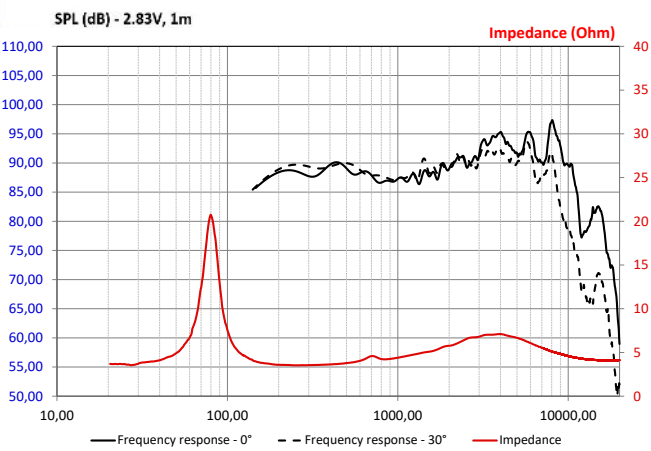

PARAMETERS

Rdc	3.1Ω
Fs	66Hz
Mms	14g
Cms	0.4mm/N
Vas	22l
Qts	1.2
Ges	1.3
Qms	10
Bxl	3.8N/A
Sd	201cm ²
SPL	93.5dB
Xmax	3mm

MECHANICAL DRAWING (MM)

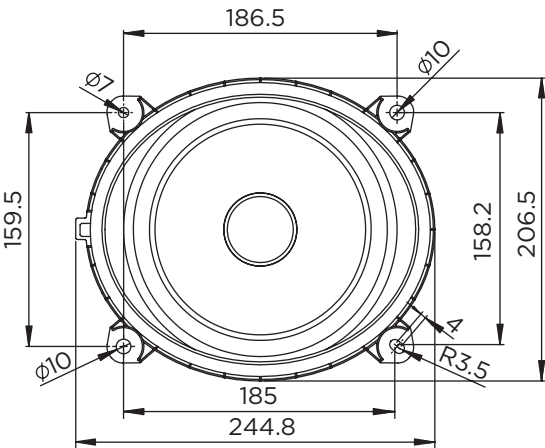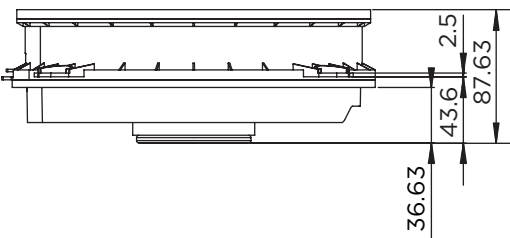


Tweeter



SPECIFICATIONS

Nominal power	15W	
Maximum power	100W	
Sensitivity	91dB	
Cone	Alu	
Nom. impedance	4Ω	
DC resistance	3.4Ω	
VC diameter	20mm	13/16"
Former	Kapton	
Layers	2	
Wire	Alu	
Net weight	40g	0.09lbs

IMPEDANCE

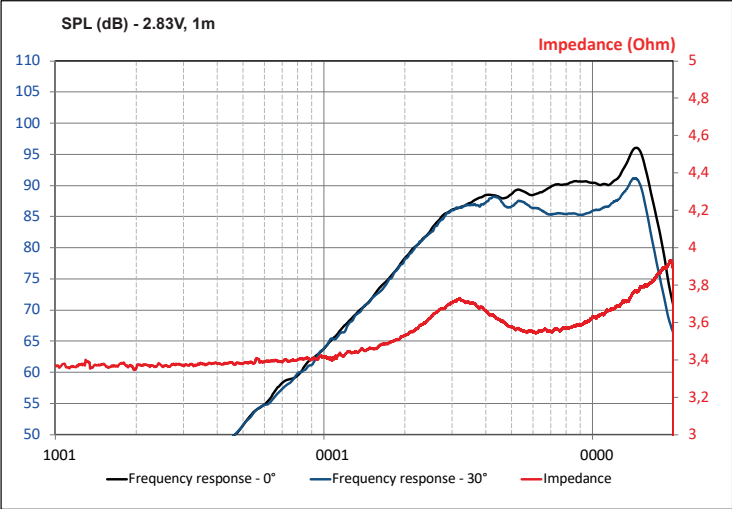

PARAMETERS

Rdc	3.5Ω
Fs	3.200Hz
SPL	88dB

MECHANICAL DRAWING (MM)

