


# FDP Sport V2

High Quality Full Range Class D amplifier using discrete components

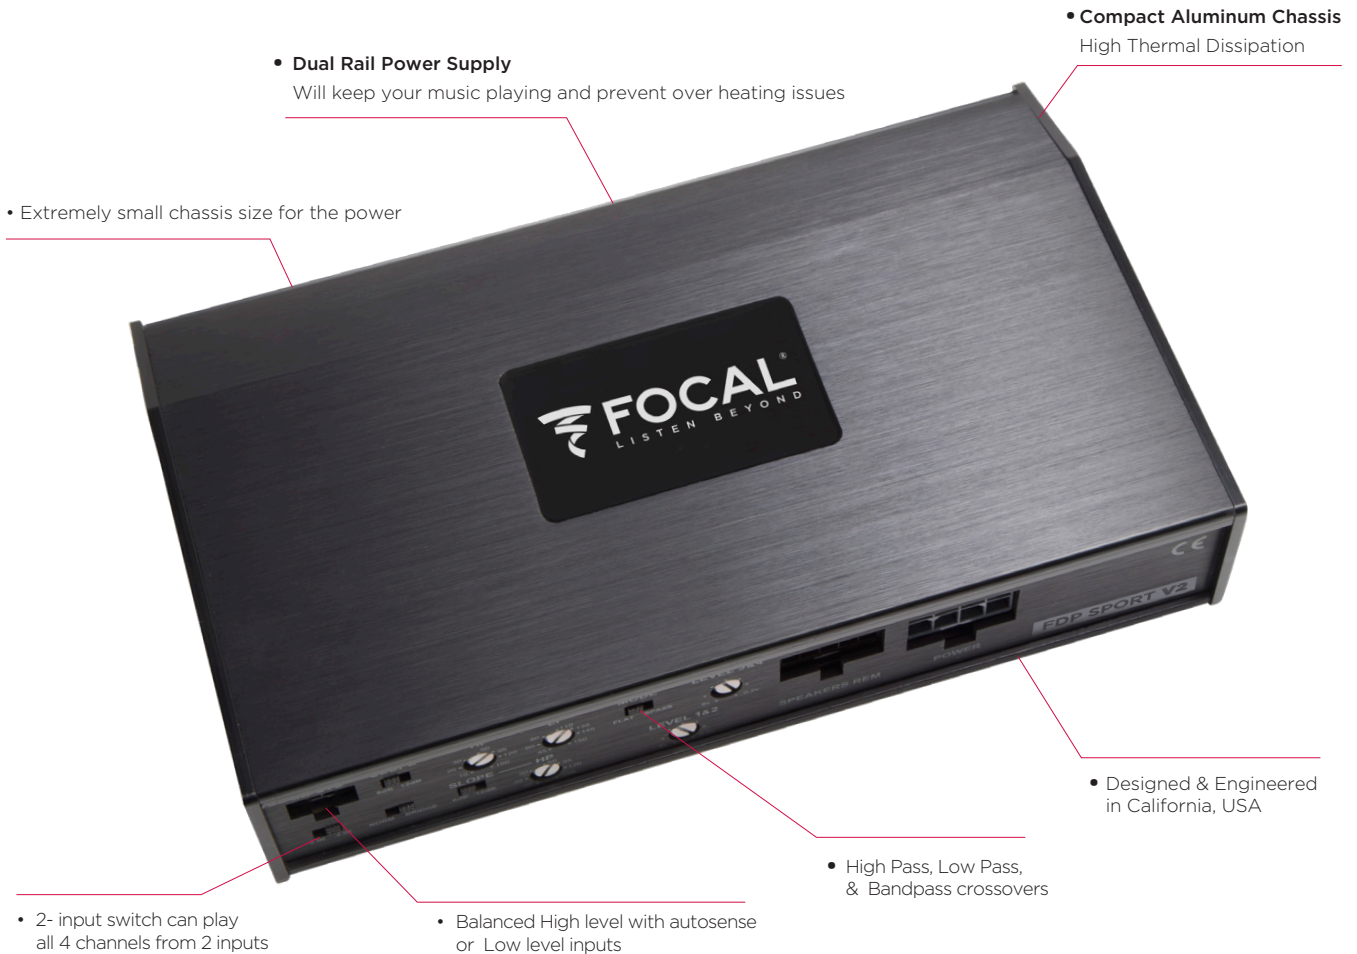

## INCLUDED ACCESSORIES

- Harley Molex input harness
- Harley Molex output harness
- OFC power and ground cable, will reach the battery.
- Adjustable mounting feet for 2 different mounting options.
- Regular 4 channel RCA input harness

## TECHNICAL CHARACTERISTICS

**Power into 4 Ohms:** 4x150W rms @ 1%THD

**Power into 2 Ohms:** 4x200W rms @ 1%THD

**Bridged mode into 4 Ohms:** 2x400W rms @ 1%THD

**Frequency response:** 10 - 30KHz

**Signal/noise ratio:** 95dB (A)

**Adjustable gain:** 300mV to 16V

**Dimensions (HxLxD):** 1-5/8 x 8-1/4 x 5 in (41x208x127mm)

**Protections:** Short-circuit thermal overload, polarity reversal, DC

## ADVANTAGES

- Very small size for power output
- Can be used in 2, 3, or 4 channel modes
- Conformally coated circuit board for added water resistance
- Easily accessible settings
- Flexible crossovers for every amp configuration
- Can be mounted above Harley Davidson radio

